


Specifications

CORE	Inferoguard 30
FRR	-/30/30sm, -/30/-sm


PART DETAILS


ITEM	STOCK NUMBER	DESCRIPTION	COMMENTS
1	TC	FRR Triboard Core	
2	Skin	FRR Facing Board	
3	HX10075	100x75x2.5mm Steel Hinge	

Lock cutout as needed to suit archi spec
Note minimum clearances apply
(as per Vision Panel/Grille Details)

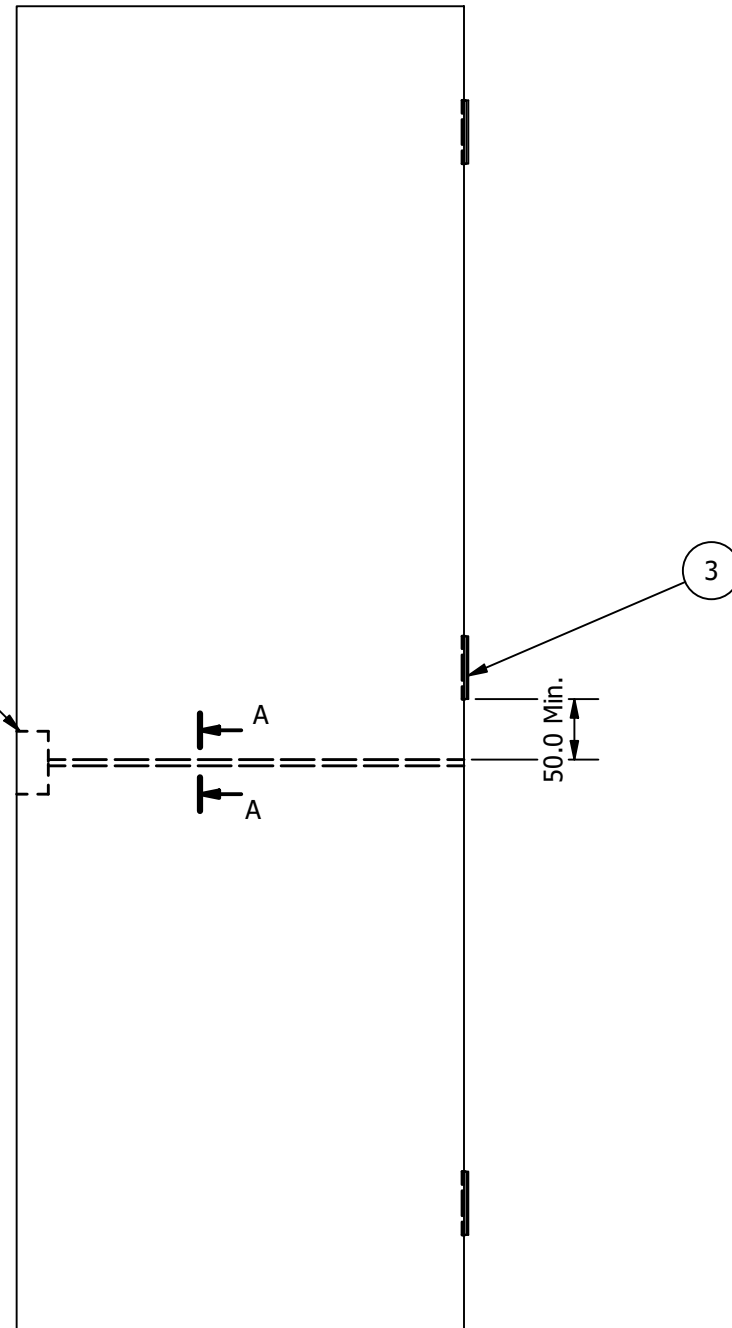

A-A (1 : 2)

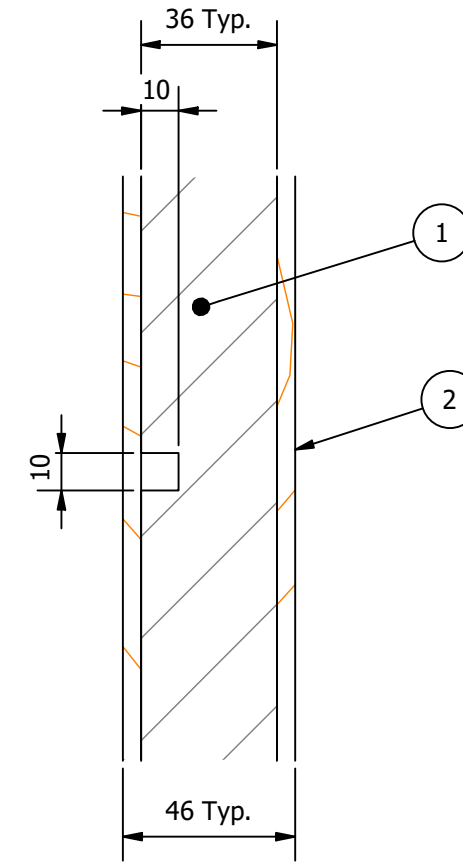

Drawn	Roy Macintyre	 SOTERIA DOORS Innovative Openings Edward Street Dargaville 0310 Ph.: 0508 966 378
Client	Soteria	
Job	FRR Details	
Drawing Type	Fabrication	
Job No.	-	Fire Resistance Rated Door Leaf - Cable Groove Detail for Electric Locks
ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE STATED TOLERANCES UNLESS OTHERWISE STATED: LINEAR: X - ±2 HOLES: ±0.1 X.X- ±0.1 ANGULAR: X.X - ±0.1° X.XX- ±0.05		Drawing No. FRR Cable Groove Revision C Sheet No. 1 / 1
© COPYRIGHT		