


6 5 4 3 2 1

Specifications	
CORE	Infernoguard 60
FRR	-/60/60sm, -/60/30sm, -/60/-sm

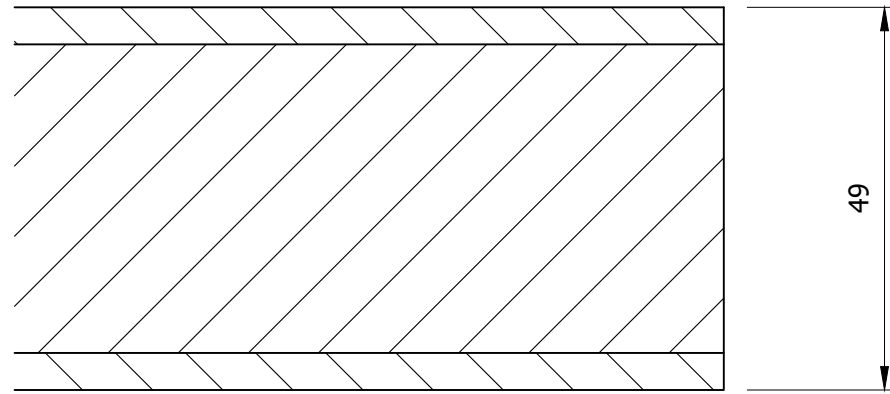

D

D

C

C



B

B

A

A

6 5 4 3 2 1

Drawn	G . STABLES	 SOTERIA™ DOORS Innovative Openings	Edward Street Dargaville 0310 Ph.: 0508 966 378
Client	Doors 'n' More		
Job	-		
Drawing Type	Installation	Fire Resistance Rated - Unclashed Edge	
Date	13/9/2023		
ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE STATED TOLERANCES UNLESS OTHERWISE STATED: LINEAR: X - ±2 HOLES: ±0.1 X.X- ±0.1 ANGULAR: X.X - ±0.1° X.XX- ±0.05		 3rd ANGLE PROJECTION	Drawing No. FRR-Unclashed
			Revision A1
		© COPYRIGHT	